


667 Flat Bed Series


- Max.stitch length 9mm;
- Thickest thread Nm10/3;
- Max sewing speed 3400RPM;
- Max.presser foot feed stroke up to 9mm;
- Full functions,including automatic trimmer,auto backtacking,PFL,HP function,Knee presser foot lifter device;
- 26mm or 32mm hook,32mm XXL hook for extra 70% bobbin capacity;
- LED lighting, stable and powerful control system;
- Air pressure:4.ONL.6Bar;
- Z-intergrated direct drive;
- Widely used on all field of medium-heavy duty applications;
- Pneumatic presser foot lifter Max.20mm;
- Large clearance 335*125mm;




667-121132Z

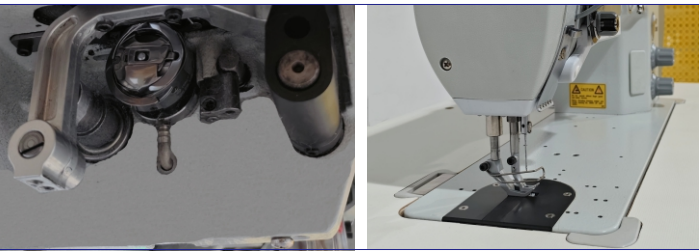

- Single dial of presser foot stroke
- Double dials of presser foot stroke

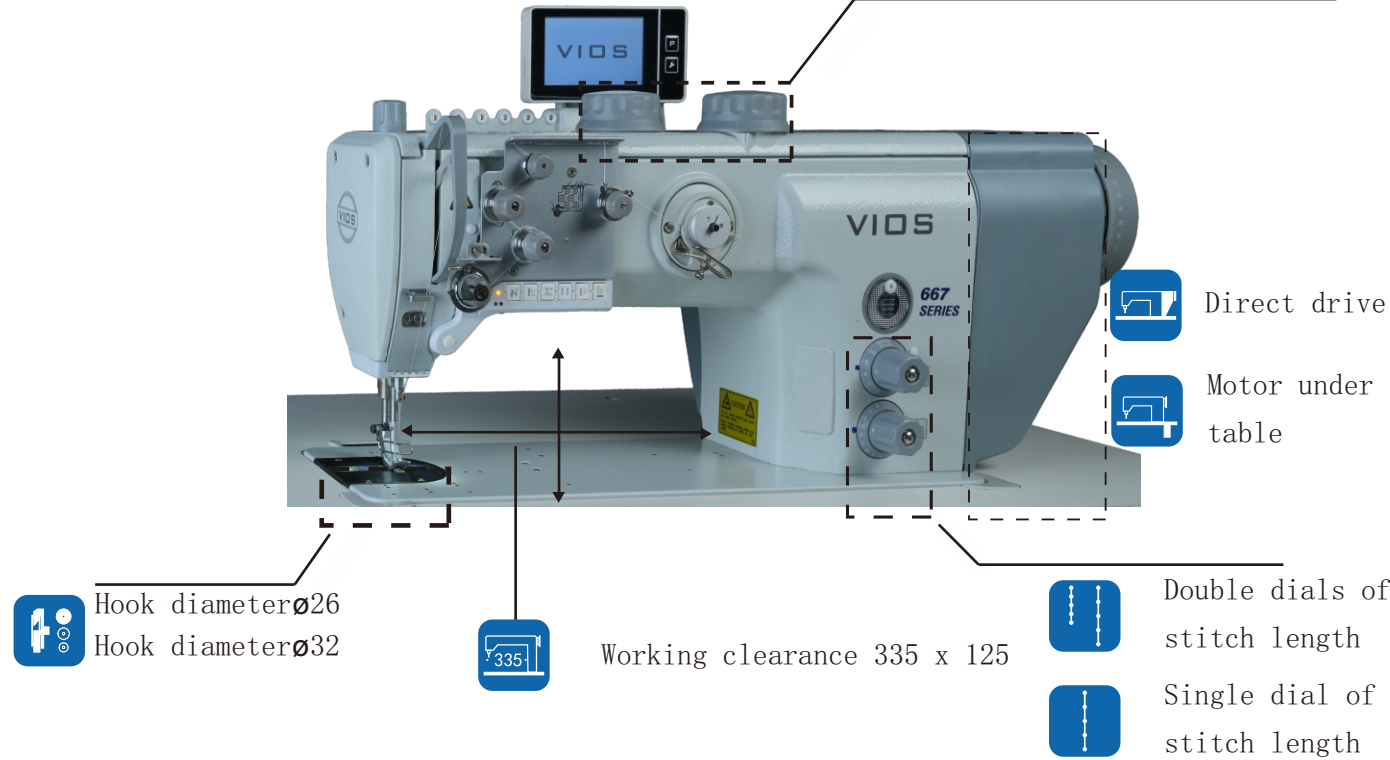

667

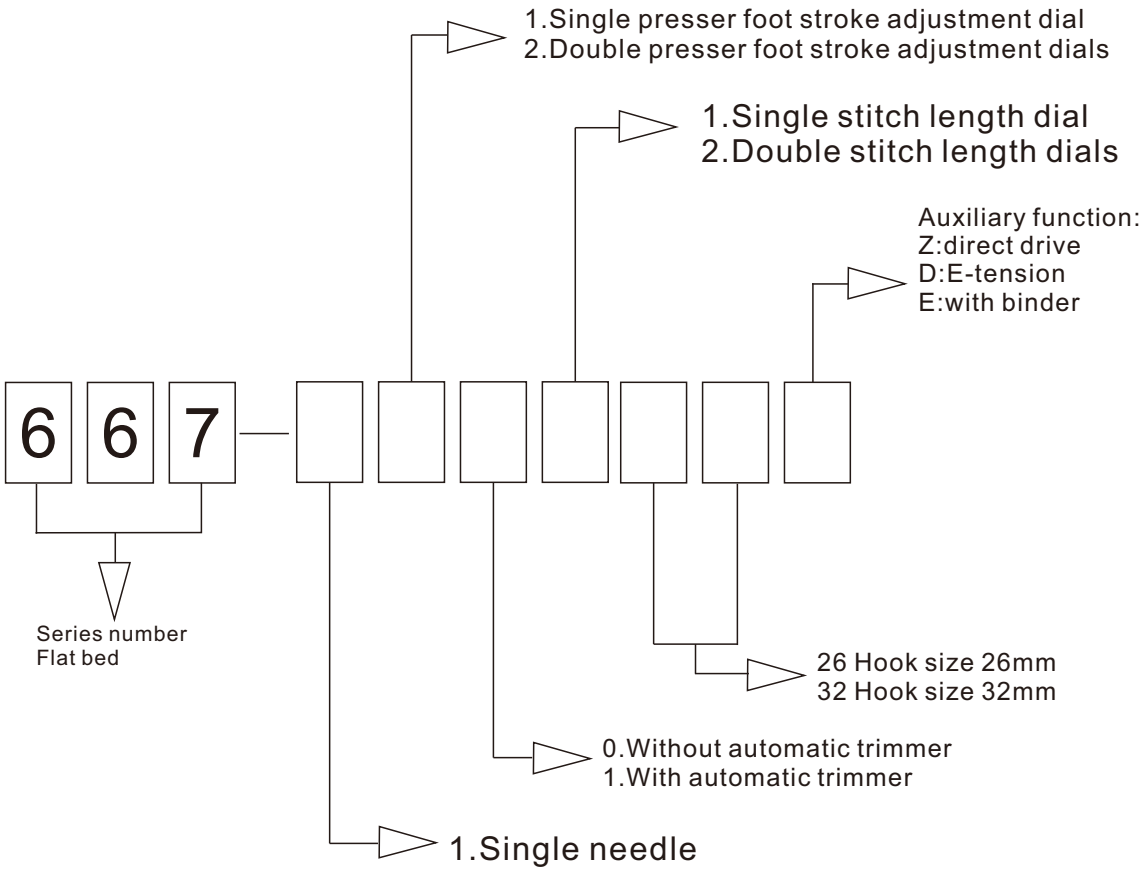

SPECIFICATIONS:

| | | | | | | | | | | | | |
|------------|---|---|-------|-----|------------------|---|----|---|---|---|---|---------|
| | | | | | | | | | | | | |
| 667 Series | • | • | 3,400 | 0-9 | Dpx35 #14-#24 | - | 20 | • | • | • | • | 335x125 |



Website



Facebook



YouTube